




PRODUCT DATA


ONE PIECE REGLET

Convenient one piece combination reglet and counterflashing designed for rapid installation on most even surfaces. Stops water penetration in places like parapet side walls, chimneys, concrete panels, and masonry walls.

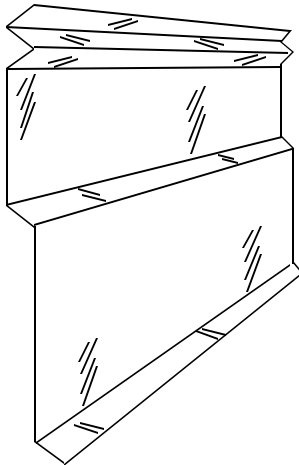

Also known as:

- TUCKER FLASHING
- PACTITE METAL

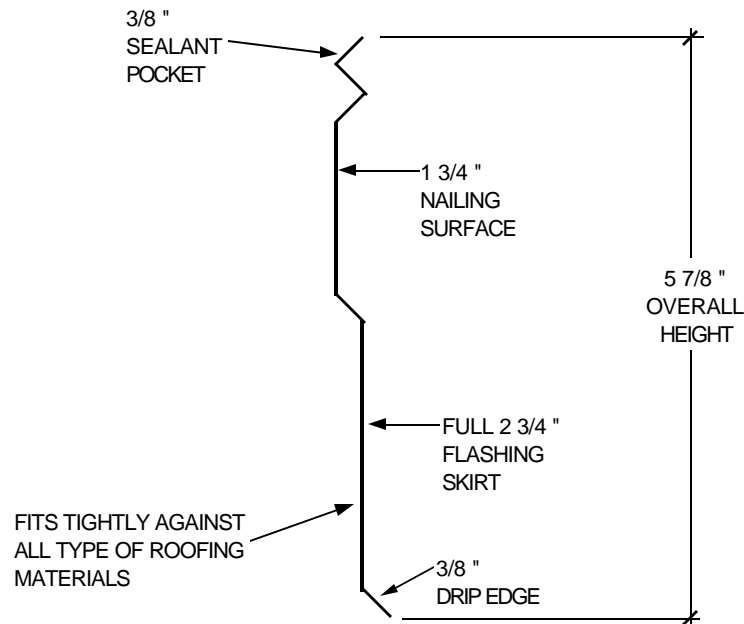

STANDARD MATERIAL

ASTM A653/A653M -G90 hot dipped galvanized steel, 24GA standard, 10' 0" lengths.

INSTALLATION

Before installing, ensure that the substrate is uniform, and even. Do not install C & J Sheet Metal Flashings on uneven substrate.

Installation shall be made in accordance with recognized sheet metal practices. SMACNA (Sheet Metal and Air Conditioning Contractors National Association) Architectural Manual specifications shall be used as guide and basis for detail whenever applicable as well as NRCA (National Roofing Contractors Association) Roofing Manual.

C & J Sheet Metal Flashings can be cut, formed, nailed or riveted using conventional hand or power tools. Flashings shall be properly fastened to the substrate by means of wood or metal screws. When fastening dissimilar metals the use of stainless steel is recommended. Use of neoprene washers or similar gasketing material is acceptable.

Jan-00